



LU1064D250 Medical Diode Laser Up to 25W Output Power @ 1064nm



Description:

The Lumics Medical Diode Laser series offers OEM integrators an excellent product to manufacture state-of-the-art end user laser systems. The easy integration and safe use of these medical laser components give the chance to be cost-efficient in development and manufacturing. Equipped with several accessories and features the Lumics diode lasers comply with CE, FDA & ROHS requirements. Lumics warrants highest reliability single emitter technology through careful design, extensive burn-in, long life-time & thermal testing.

Features:

- Red Pilot
- Monitor Photodiodes
- Fiber Sensors
- Thermistor

Functions:

- 3 Single Emitters
- Sealed Housing
- 200µm Fiber
- Small Foot Print


Benefits:

- FDH-required Sensors
- Ultra long Lifetime
- OEM Quantities
- Passive Cooling

Applications:

- Dental
- Dermatology
- Therapeutic
- Veterinary

Module Drawing (Dimensions in mm)

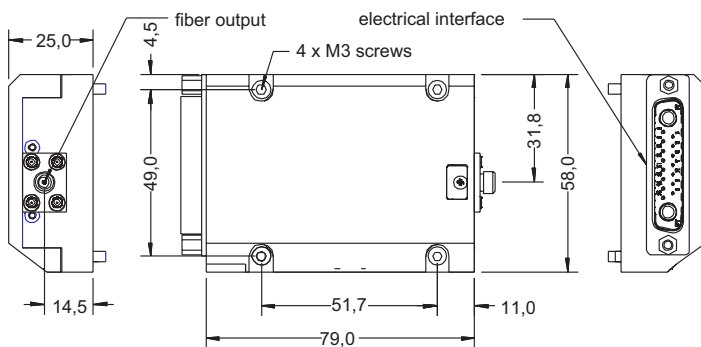


Pin Connections

Pin	Configuration
1	LM35 5V (optional NTC)
2	LM35 Signal
3	NTC*
4	NTC*
5	Fiber Sensor 12V
6	Fiber Sensor (Gnd)
7	Fiber Sensor Signal 1
8	Fiber Sensor Signal 2 *
9	LM35 (Gnd)
10	Pilot Laser (Gnd)
11	Pilot Laser 3V
12	Monitor Diode 5V
13	Monitor Diode (Gnd)
14	Monitor Diode Signal 1
15	Monitor Diode Signal 2 *

A1	Laser Diode (-)
A2	Laser Diode (+)

* = optional

F-SMA Connector

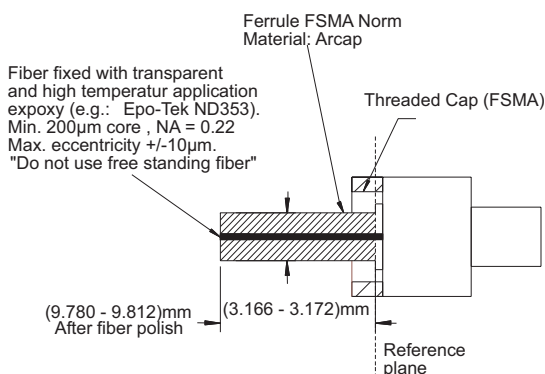

Your ideas are welcome.


Electrical and Optical Characteristics

Parameter	Conditions	Min	Typ	Max	Unit
Optical					
Output Power	P_{op} (c.w.)		25		W
Peak Wavelength (at P_{op})	λ_{peak}	1054	1064	1074	nm
Spectral Width (FWHM)	λ_{rms}			5	nm
Spectral Shift with Temp.	$\lambda_{T shift}$			0.3	nm / K
Fiber Core Diameter			200		μ m
Fiber Centricity			<10		μ m
Numerical Aperture	NA		0.22		
Fiber Connector Type			SMA905		
Electrical					
Forward Current	I_p		14		A
Threshold Current	I_{th}		1.1		A
Forward Voltage	V_p		4.5		V
Slope Efficiency	η_{diff}		1.7		W / A
Conversion Efficiency			40		%
Features					
Pilot Beam Output Power				1	mW
Pilot Beam Wavelength		630	635	640	nm
Pilot Beam Operating Voltage			3	3.3	V
Pilot Beam Operating Current			15	20	mA
Power Monitor Operating Voltage			5		V
Power Monitor Signal Voltage			0 - 4		V
Fiber Detection Sensor Operating Voltage			12		V
Fiber Detection Sensor Signal Voltage			12 / 0		V
Temperature Sensor / Energy Constant			NTC 10k, 3988K		

Important Note:

Read and carefully follow operating manual instructions. Especially - whenever power supply is switched on or off, always disconnect from laser module. See manual for details. Uncontrolled on / off switching may cause spikes and result in fatal device damage.



General Parameters / Accessories

Parameter	Symbol	Min	Typ	Max	Unit
Expected Laser Diode Lifetime (1)	MTTF		50.000		h
Storage Temperature	T_s	0		+50	$^{\circ}$ C
Operation Temperature	T_p	15		35	$^{\circ}$ C
Humidity / Non-condensing Atmosphere				90	%
Recommended Thermal Heatsink Resistance				0.1	K / W
Weight				179	g
Compliance			CE, FDA, ROHS		
Standard Accessories					
Interface Connector			17W2 Female		
Mounting Screws / metric			4 x M3 x 10		
Options					
2nd Monitor Diode / 2nd Fiber Detection Sensor (2)					
Optical Fiber Patchcord with SMA Connectors			from our partner FCC GmbH, www.fibercableconnect.de		

Note:

- (1) At 20 $^{\circ}$ C Operating Temperature
- (2) Please ask for Quotation

User Safety



Your ideas are welcome.